

# LED FLOOD LIGHT-SW3

Canara High quality LED flood light consist of LED's, support a variety of light distribution for different applications, including flood lighting and façade lighting.

## FEATURES

- Adopts original LED light source, high flux output, excellent consistency of light color ; constant current driver with PWM gray control installed inside.
- Light body adopts high pressure die-casting aluminium, surface with electrostatic plastic coating.
- Lampshade adopts high strength toughened glass, resist the impact and friction.
- Environmental friendly and free from UV, IR or Mercury

## SPECIFICATIONS

Power: 250W/500W/750W/1000W/1200W

Power Supply : AC100-277V, 50/60HZ

Color Temperature:3200K/4000K/5600K/6500K

Power Factor : > 0.95

Beam angle : 10°/25°/45°/60°/90°/Asymmetric


Light Efficiency: 130-150lm/w

Protection rating : IP66,IK08

CRI: Ra>80

LED lifetime : 50000 hours

Body : Die-cast aluminium casing

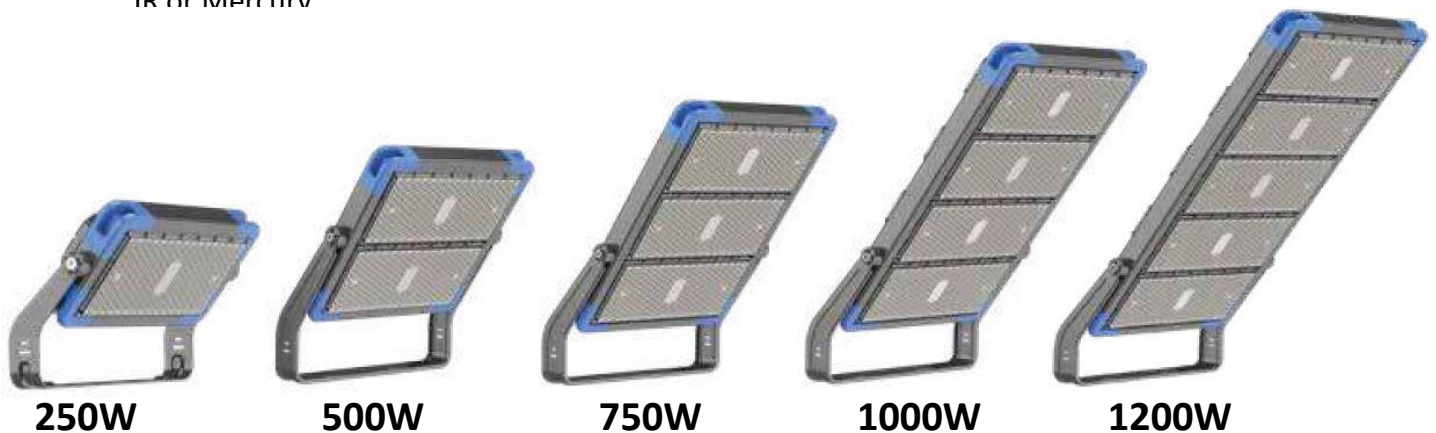

Product Code : CAN LED SFL250  
CAN LED SFL500  
CAN LED SFL700  
CAN LED SFL1000  
CAN LED SFL1200

## Applications :

Outdoor Landscape lighting such as hotels, shopping malls, buildings, bridges and sports Lighting etc.

**CaNaRa**  
**Lighting**  
GLOBAL ILLUMINATORS

# LED FLOOD LIGHT-SW47

Canara High quality LED flood light consist of LED's, support a variety of light distribution for different applications, including flood lighting and façade lighting.

## FEATURES

- Adopts original LED light source, high flux output, excellent consistency of light color ; constant current driver with PWM gray control installed inside.
- Light body adopts high pressure die-casting aluminium, surface with electrostatic plastic coating.
- Lampshade adopts high strength toughened glass, resist the impact and friction.
- Environmental friendly and free from UV, IR or Mercury.

## SPECIFICATIONS

Power: 400W/500W/600W/800W/  
1000W/1200W

Power Supply : AC100-277V, 50/60HZ

Color Temperature:3200K/4000K/5600K/6500K

Power Factor : > 0.95

Beam angle : 10°/25°/45°/60°/90°

Light Efficiency: 130-150lm/w

Protection rating : IP66,IK08

CRI: Ra>80

LED lifetime : 50000 hours

Body : Die-cast aluminium casing



Product Code : CAN LED SFL250  
CAN LED SFL350  
CAN LED SFL500  
CAN LED SFL700  
CAN LED SFL1000  
CAN LED SFL1200

## Applications :

Outdoor Landscape lighting such as hotels, shopping malls, buildings, bridges and sports Lighting etc.

**CaNaRa**  
**Lighting**  
GLOBAL ILLUMINATORS

# LED FLOOD LIGHT-SW5

Canara High quality LED flood light consist of LED's, support a variety of light distribution for different applications, including flood lighting and façade lighting.

## FEATURES

- Adopts original LED light source, high flux output, excellent consistency of light color ; constant current driver with PWM gray control installed inside.
- Light body adopts high pressure die-casting aluminium, surface with electrostatic plastic coating.
- Lampshade adopts high strength toughened glass, resist the impact and friction.
- Environmental friendly and free from UV, IR or Mercury.

## SPECIFICATIONS

Power: 200W/400W/600W/800W/1000W/  
1200W/1400W/1600W

Power Supply : AC100-277V, 50/60HZ

Color Temperature:3200K/4000K/5600K/6500K

Power Factor : > 0.95

Beam angle : 10°/25°/45°/60°/90°/Asymmetric


Light Efficiency: 130-150lm/w

Protection rating : IP66,IK08

CRI: Ra>80

LED lifetime : 50000 hours

Body : Die-cast aluminium casing

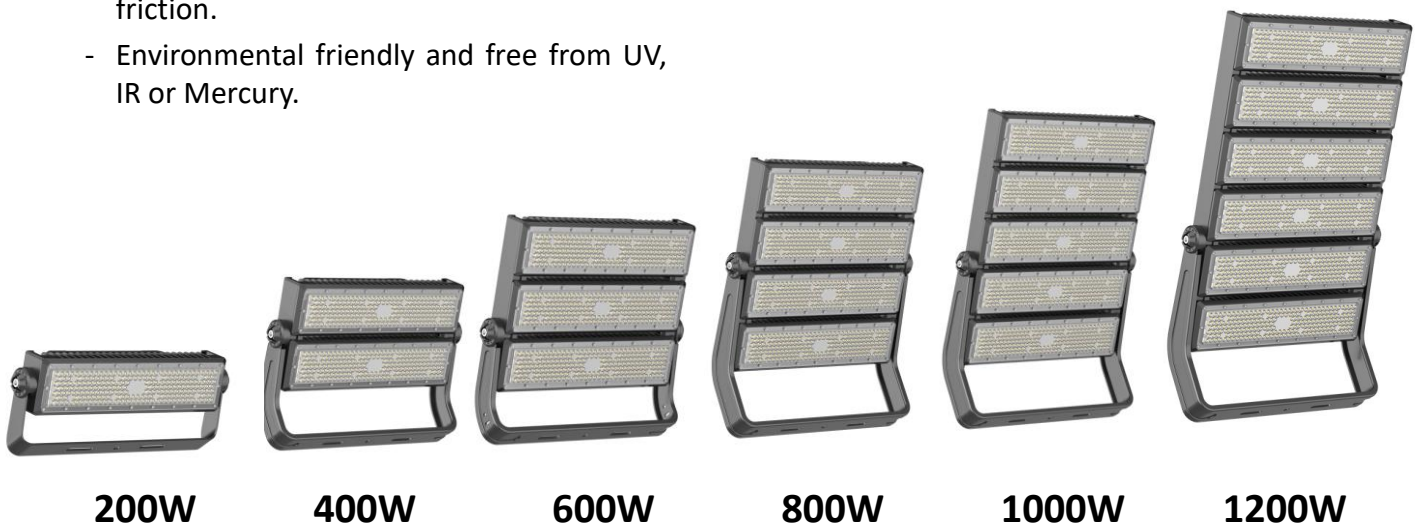

Product Code : CAN LED SFL200  
CAN LED SFL500  
CAN LED SFL700  
CAN LED SFL1000  
CAN LED SFL1200  
CAN LED SFL1400  
CAN LED SFL1600

## Applications :

Outdoor Landscape lighting such as hotels, shopping malls, buildings, bridges and sports Lighting etc.

**CaNaRa**  
**Lighting**  
GLOBAL ILLUMINATORS

# LED FLOOD LIGHT-SW7

Canara High quality LED flood light consist of LED's, support a variety of light distribution for different applications, including flood lighting and façade lighting.

## FEATURES

- Adopts original LED light source, high flux output, excellent consistency of light color ; constant current driver with PWM gray control installed inside.
- Light body adopts high pressure die-casting aluminium, surface with electrostatic plastic coating.
- Lampshade adopts high strength toughened glass, resist the impact and friction.
- Environmental friendly and free from UV, IR or Mercury.



Product Code : CAN LED SFL250  
CAN LED SFL350  
CAN LED SFL500  
CAN LED SFL700  
CAN LED SFL1000  
CAN LED SFL1200  
CAN LED SFL1500  
CAN LED SFL1800

## Applications :

Outdoor Landscape lighting such as hotels, shopping malls, buildings, bridges and sports Lighting etc.

## SPECIFICATIONS

Power: 400W/500W/600W/800W/  
1000W/1200W/1500W/1800W

Power Supply : AC100-277V, 50/60HZ

Color Temperature:3200K/4000K/5600K/6500K

Power Factor : > 0.95

Beam angle : 10°/25°/45°/60°/90°/Asymmetric

Light Efficiency: 150-160lm/w

Protection rating : IP66,IK08

CRI: Ra>80

LED lifetime : 50000 hours

Body : Die-cast aluminium casing

**CaNaRa**  
**Lighting**  
GLOBAL ILLUMINATORS